Dino-Lite Europe - Phone: - Email:

AM4113TL



Marca:


Código del producto: AM4113TL

Short Description

1.3 Megapixel resolution With magnification lock 10x ~ 90x magnification Long working distance

Descripción

The AM4113TL is a special model with long working distance up to 15 cm at 20x magnification and around 4cm at 90x magnification. The extra working distance makes the TL series an ideal solution for tasks where you need more working distance to the object, for example repair, rework or assembly tasks.

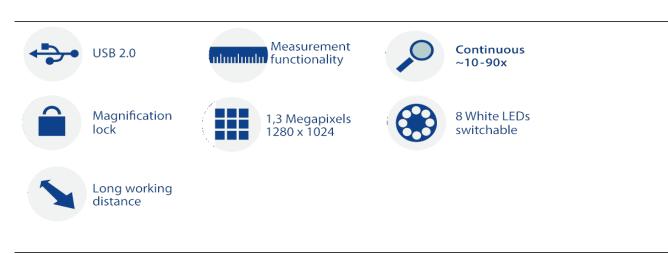

Working distance/field of view/depth of field

MAGNIFICATI WORKING		FIELD OF	FIELD OF	DEPTH OF	
ON RATE	DISTANCE	VIEW(X)	VIEW(Y)	FIELD	
20	151.0	19.6	15.6		6
30	101.0	13.0	10.4	3.4	
40	77.2	9.8	7.8	2.2	
50	64.1	7.8	6.3	1.65	
60	56.2	6.5	5.2	•	
70	51.3	5.6	4.5	•	
80	48.3	4.9	3.9	•	
90	46.6	4.3	3.5	0.8	
Listed values may differ				Unit = mm	

Especificación

slightly

Especificación				
Lighting				
Light/ LED type	White			
Number of LEDs	8			
LED on/off switchable:	Yes			
Infrared filter	IR cut-filter >650 nm			
Diffuser available	No			
Emission filter	No			
Polarizer	No			
Optics				
Magnification	$10x \sim 90x$			
Macro zoom	No			
Working distance	Long			
Lens type	Glass with anti-reflection coating			
Sensor				
Sensor type	CMOS			
Resolution	1.3 Megapixel (1280x1024)			
Maximum frame rate	30 fps			
Compatibility				
Interface	USB 2.0			
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up			
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)			
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,			
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX			
Supported video formats (Windows)	WMV, FLV, SWF			

Supported image formats (MacOS)	JPEG, PNG			
Supported video formats (MacOS)	MOV			
Imaging standards	DirectShow, UVC			
Wifi	Wireless-ready, requires the WF-10 WiFi streamer (optional)			
Housing				
Housing material	Composite/ plastic housing			
Magnification lock	Yes			
Dimensions	10.5cm (L) x 3.2cm (D)			
Weight	105g			
Features				
Special feature	No			
Measurement	Yes			
Calibration	Yes			
Microtouch sensor	Yes			
ESD safe	No			
Information				
Package contents	Microscope, carry pouch, software CD, calibration target, user manual			
Warranty information	2 years European warranty			
Regulatory approval	CE, FCC, ROHS			
Price range	€350,00 - €500,00			