## AM7025X

Marque: Dino-Lite Code produit: AM7025X




## **Courte description**

5 Megapixel resolution Fits 23, 30 and 30,5 mm ocular Advanced software Including measurements

## Description

The all new DinoEye Edge 5MP eyepiece camera provides superior image quality and true colour reproduction. This makes this new DinoEye suitable for demanding applications where true colour reproduction is of the utmost importance, like with pathology samples or quality control.

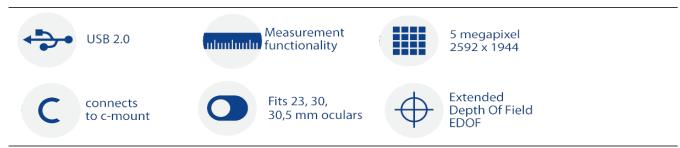

The large field of view allows you to capture more details with one image. You can replace one of the eyepieces of the microscope by the Dino-Eye camera which has a diameter of 23mm, or you can use one of the provided adapters of 30mm or 30,5mm to make it fit.

Additionally you can use the c-mount thread that is included with the 30,5mm adapter to be able to connect the DinoEye to the c-mount adapter (not included) on the Trinocular tube of the microscope. The AM7025X eyepiece camera will therefore fit to almost all microscope brands and models available. The AM7025X comes with DinoCapture software for Windows and DinoXcope software for MAC, which includes measurement, annotation, video and time-lapse functions.

OpticsMagnification20x, built-inLens typeGlass with Anti-Reflection coatingSensorSensor typeCMOSResolution5 Megapixel (2592x1944)Maximum frame rate30 fpsCompatibilityInterfaceUSB 2.0Operating systemWindows 7, 8, 10 & 11, MacOS 10.12 and upSoftwareDinoCapture 2.0 (Windows), DinoXcope (Mac OS)Supported image formatsBMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGXSupported video formatsWMV, FLV, SWF (max 1.3MP)(Windows)PCS, MNG (max 1.3MP)Supported video formatsJPEG, PNG(MacOS)InterfsceImaging standardsDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)Housing Metal body117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)MeasurementYes	Spécification	
Lens typeGlass with Anti-Reflection coatingSensorSensor typeCMOSResolution5 Megapixel (2592x1944)Maximum frame rate30 fpsCompatibilityInterfaceUSB 2.0Operating systemWindows 7, 8, 10 & 11, MacOS 10.12 and upSoftwareDinoCapture 2.0 (Windows), DinoXcope (Mac OS)Supported image formatsBMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX(Windows)PCX, MNG, WBMP, JP2, JPC, PGXSupported video formatsWMV, FLV, SWF (max 1.3MP)(Windows)PEG, PNG(MacOS)MOV (max 1.3MP)(MacOS)DirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)Housing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)		
SensorSensor typeCMOSResolution5 Megapixel (2592x1944)Maximum frame rate30 fpsCompatibility30 fpsInterfaceUSB 2.0Operating systemWindows 7, 8, 10 & 11, MacOS 10.12 and upSoftwareDinoCapture 2.0 (Windows), DinoXcope (Mac OS)Supported image formatsBMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGXSupported video formatsWMV, FLV, SWF (max 1.3MP)(Windows)JPEG, PNGSupported video formatsMOV (max 1.3MP)(MacOS)DirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)Housing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Magnification	20x, built-in
Sensor typeCMOSResolution5 Megapixel (2592x1944)Maximum frame rate30 fpsCompatibility30 fpsUsB 2.0Operating systemOperating systemWindows 7, 8, 10 & 11, MacOS 10.12 and upSoftwareDinoCapture 2.0 (Windows), DinoXcope (Mac OS)Supported image formatsBMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGXSupported video formatsWMV, FLV, SWF (max 1.3MP)(Windows)JPEG, PNGSupported video formatsMOV (max 1.3MP)(MacOS)DirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)Housing Meight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Lens type	Glass with Anti-Reflection coating
Resolution5 Megapixel (2592x1944)Maximum frame rate30 fpsCompatibilityInterfaceInterfaceUSB 2.0Operating systemWindows 7, 8, 10 & 11, MacOS 10.12 and upSoftwareDinoCapture 2.0 (Windows), DinoXcope (Mac OS)Supported image formatsBMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, (Windows)Windows)PCX, MNG, WBMP, JP2, JPC, PGXSupported video formatsWMV, FLV, SWF (max 1.3MP)(Windows)JPEG, PNGSupported video formatsMOV (max 1.3MP)(MacOS)DirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)Housing Metal bodyDimensionsHousing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Sensor	
Maximum frame rate30 fpsCompatibilityInterfaceUSB 2.0Operating systemWindows 7, 8, 10 & 11, MacOS 10.12 and upSoftwareDinoCapture 2.0 (Windows), DinoXcope (Mac OS)Supported image formatsBMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGXSupported video formatsWMV, FLV, SWF (max 1.3MP)(Windows)JPEG, PNGSupported video formatsMOV (max 1.3MP)(MacOS)DirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)Housing Metal bodyS0 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Sensor type	CMOS
CompatibilityInterfaceUSB 2.0Operating systemWindows 7, 8, 10 & 11, MacOS 10.12 and upSoftwareDinoCapture 2.0 (Windows), DinoXcope (Mac OS)Supported image formatsBMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGXWindows)PCX, MNG, WBMP, JP2, JPC, PGXSupported video formatsWMV, FLV, SWF (max 1.3MP)(Windows)JPEG, PNGSupported video formatsMOV (max 1.3MP)(MacOS)DirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)Housing Dimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Resolution	5 Megapixel (2592x1944)
InterfaceUSB 2.0Operating systemWindows 7, 8, 10 & 11, MacOS 10.12 and upSoftwareDinoCapture 2.0 (Windows), DinoXcope (Mac OS)Supported image formatsBMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGXSupported video formats (Windows)WMV, FLV, SWF (max 1.3MP)Supported image formats (MacOS)JPEG, PNGSupported video formats (MacOS)MOV (max 1.3MP)Supported video formats (MacOS)DirectShow, UVCWifiDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)Housing Dimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Maximum frame rate	30 fps
Operating systemWindows 7, 8, 10 & 11, MacOS 10.12 and upSoftwareDinoCapture 2.0 (Windows), DinoXcope (Mac OS)Supported image formatsBMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGXSupported video formatsWMV, FLV, SWF (max 1.3MP)(Windows)JPEG, PNGSupported video formatsMOV (max 1.3MP)(MacOS)DirectShow, UVCSupported video formatsMOV (max 1.3MP)(MacOS)DirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)Housing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Compatibility	
SoftwareDinoCapture 2.0 (Windows), DinoXcope (Mac OS)Supported image formatsBMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGXSupported video formatsWMV, FLV, SWF (max 1.3MP)(Windows)JPEG, PNGSupported video formatsMOV (max 1.3MP)(MacOS)MOV (max 1.3MP)Supported video formatsMOV (max 1.3MP)(MacOS)DirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)HousingMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Interface	USB 2.0
OS)Supported image formats (Windows)BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGXSupported video formats (Windows)WMV, FLV, SWF (max 1.3MP)Supported image formats (MacOS)JPEG, PNGSupported video formats (MacOS)MOV (max 1.3MP)Imaging standardsDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)HousingHousingHousing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Operating system	Windows 7, 8, 10 & 11, MacOS 10.12 and up
Windows)PCX, MNG, WBMP, JP2, JPC, PGXSupported video formatsWMV, FLV, SWF (max 1.3MP)(Windows)JPEG, PNGSupported video formatsMOV (max 1.3MP)(MacOS)MOV (max 1.3MP)Imaging standardsDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)HousingMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Software	
Supported video formats (Windows)WMV, FLV, SWF (max 1.3MP)Supported image formats (MacOS)JPEG, PNGSupported video formats (MacOS)MOV (max 1.3MP)Imaging standardsDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)HousingHousingHousing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,
Windows)JPEG, PNGSupported image formats (MacOS)JPEG, PNGSupported video formats (MacOS)MOV (max 1.3MP)Imaging standardsDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)Housing Housing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX
Supported image formats (MacOS)JPEG, PNGSupported video formats (MacOS)MOV (max 1.3MP)Imaging standardsDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)HousingMetal bodyHousing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Supported video formats	WMV, FLV, SWF (max 1.3MP)
(MacOS)MOV (max 1.3MP)Supported video formats (MacOS)MOV (max 1.3MP)Imaging standardsDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)HousingUmage (Optional)Housing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	(Windows)	
Supported video formats (MacOS)MOV (max 1.3MP)Imaging standardsDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)HousingHousing materialHousing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Supported image formats	JPEG, PNG
(MacOS)DirectShow, UVCImaging standardsDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)HousingHousing materialHousing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	(MacOS)	
Imaging standardsDirectShow, UVCWifiWireless-ready, requires the WF-10 WiFi streamer (optional)HousingHousing materialHousing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Supported video formats	MOV (max 1.3MP)
WifiWireless-ready, requires the WF-10 WiFi streamer (optional)HousingMetal bodyHousing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesSpecial featureExtended Depth of Field (EDOF)	(MacOS)	
Image: Control of the control of th	Imaging standards	DirectShow, UVC
Housing materialMetal bodyDimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesSpecial featureExtended Depth of Field (EDOF)	Wifi	
Dimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesSpecial featureExtended Depth of Field (EDOF)	Housing	
Dimensions80 mm (H) x 32 mm (D)Weight117 gCable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesSpecial featureExtended Depth of Field (EDOF)	Housing material	Metal body
Cable length1.8 mOcular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesSpecial featureExtended Depth of Field (EDOF)		80 mm (H) x 32 mm (D)
Ocular outer diameter:23, 30, 30,5 mmMounting type:Inside ocular/tube & c-mountFeaturesExtended Depth of Field (EDOF)	Weight	
Mounting type:Inside ocular/tube & c-mountFeaturesSpecial featureExtended Depth of Field (EDOF)	Cable length	1.8 m
FeaturesSpecial featureExtended Depth of Field (EDOF)	Ocular outer diameter:	23, 30, 30,5 mm
Special feature Extended Depth of Field (EDOF)	Mounting type:	Inside ocular/tube & c-mount
	Features	
Measurement Yes	Special feature	Extended Depth of Field (EDOF)
	Measurement	Yes

Calibration	Yes
Microtouch sensor	No
Information	
Package contents	DinoEye eyepiece camera, carry pouch, software
	CD, calibration target, user manual
Warranty information	2 years European warranty
Regulatory approval	CE, FCC, ROHS
Accessory range:	DinoEye Eyepieces
Price range	€250,00 - €500,00

## Galerie du produit









