Dino-Lite Europe - Phone: - Email:

WF4915ZTL



Marque:


Code produit: WF4915ZTL - Wireless

Courte description

1.3 Megapixel Edge sensor Extended Depth of Field (EDOF) Extended Dynamic Range (EDR) Flexible LED Control (FLC) Automatic Magnification Reading (AMR)

Description

The Dino-Lite WF4915ZTL is a Wireless model that is part of the Long Working Distance (LWD) series. Go from wireless to wired and back in an instant. Work wired via USB or work wireless with the attachable WF-20 Wireless adapter.

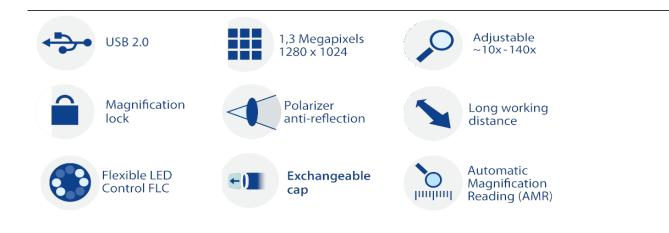







The WF4915ZTL is equipped with premium features such as Extended Depth of Field (EDOF), Extended Dynamic Range (EDR), Flexible LED Control (FLC), integrated polarizer, extensive measurement functionality and Automatic Magnification Reading (AMR) for measurement-intensive applications.

The main features of the WF4915ZTL are:

- Completely wireless solution (including WF20)
- 10-140x magnification
- 1.3 Megapixel Edge sensor
- Extended Depth of Field (EDOF)
- Extended Dynamic Range (EDR)
- Automatic Magnification Reading (AMR)
- Adjustable polarizer
- Flexible LED Control (FLC)
- And more...

(*EDOF/EDR only functions under Windows OS)

Working distance/field of view/depth of field

Magnification	Working	Field of View(x)	Field of	Depth of Field
Rate	Distance *		View(y)	
Listed values	* Without front			Unit = mm
may differ	cap			
slightly				
10	234.5	39.0	31.2	12
20	112.5	19.5	15.6	4.5
30	72.5	13.0	10.4	3.1
40	54.5	9.8	7.8	1.8
50	43.5	7.8	6.2	1.2
60	37.5	6.5	5.2	0.9
70	33.7	5.6	4.5	0.6

80	31.3	4.9	3.9	0.5
90	29.9	4.3	3.5	0.37
100	29.2	3.9	3.1	0.28
110	29.1	3.5	2.8	0.22
120	29.3	3.3	2.6	0.17
130	29.8	3.0	2.4	0.12
140	30.5	2.8	2.2	0.09

Spécification

Specification			
Lighting			
Light/ LED type	White		
Number of LEDs	8		
LED on/off switchable:	Yes		
Infrared filter	IR cut-filter >650 nm		
Diffuser available	Yes (N3C-D included)		
Emission filter	No		
Polarizer	Yes, linear		
Optics			
Magnification	$10x \sim 140x$		
Macro zoom	No		
Working distance	Long		
Lens type	Glass with anti-reflection coating		
Sensor			
Sensor type	CMOS		
Resolution	1.3 Megapixel (1280x1024)		
Maximum frame rate	30 fps		
Compatibility			
Interface	USB 2.0		
Operating system	Windows 7, 8, 10 & 11, MacOS 10.11.6 and up (cable only)		
Software	DinoCapture 2.0 (Windows) cable + wireless, DinoXcope (Mac OS) cable only, DinoConnect wireless only		
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,		
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX		
Supported video formats (Windows)	WMV, FLV, SWF		
Supported image formats (MacOS)	JPEG, PNG		
Supported video formats	MOV		

(MacOS)	Discottle over LIVC		
Imaging standards	DirectShow, UVC		
Wifi	Yes		
Housing			
Housing material	Composite/ plastic housing		
Magnification lock	Yes		
Dimensions	11.4cm (L) x 3.3cm (D)		
Weight	111g		
Cable length	1.8m		
Features			
Special feature	Automatic Magnification Reading (AMR), Extended Dynamic Range (EDR), Extended Depth of Field (EDOF), Flexible LED Control (FLC)		
Measurement	Yes		
Calibration	Yes		
Microtouch sensor	Yes		
ESD safe	No		
Information			
Package contents	Microscope, WF-20, carry pouch, software CD, calibration target, user manual, N3C-O- Open cap, N3C-C- Closed cap, N3C-D- diffuser cap, N3C-E-extension cap, N3C-L- Long cap, N3C-S- Side light cap		
Warranty information	2 years European warranty		
Regulatory approval	CE, FCC, ROHS, UKCA – available upon request – marketing@dino-lite.eu		
Price range	€1100,00 - €1300,00		







