Dino-Lite Europe - Phone: - Email:

AM4115T-RFYW

Marca: Dino-Lite

Codice del prodotto: AM4115T-RFYW




Short Description

1.3 Megapixel resolution575nm excitation and 610nm emission filter20-220x magnificationTo observe TxRed, mCherry

Descrizione

The Dino-Lite AM4115T-RFYW digital microscope is optimized for research and viewing fluorescent objects by using 575nm excitation LEDs. It has a long-pass type 610nm emission filter that is designed to observe a wide range of fluorophores with applications in developmental biology, pathology, and anatomy.

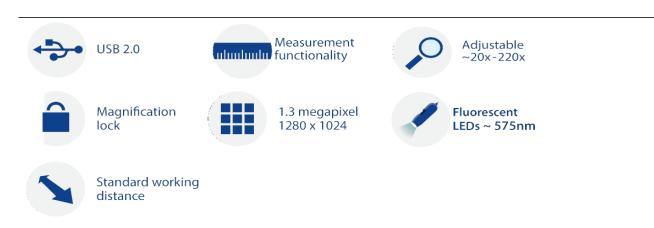

LEDs for excitation lighting to the white LED, which is convenient for locating the object and obtaining an easy focus. All of these factors make the AM4115T-RFYW the smallest fluorescence microscope in the world, capable of many applications and visualizing a vast range of fluorescence.

» Special models available on request.

Working distance/field of view/depth of field					
MAGNIFICATI	WORKING	FIELD OF	FIELD OF	DEPTH OF	
ON RATE	DISTANCE	VIEW(X)	VIEW(Y)	FIELD	
Listed values	* Without front Unit = mm			Unit = mm	
may differ	cap				
slightly					
20	60.2	19.5	15.6	2.5	
30	33.5	13.0	10.4	1.8	
40	20.9	9.8	7.8	1.5	
50	13.9	7.8	6.3	-	
60	9.7	6.5	5.2	-	
70	7.1	5.6	4.5	1.0	
80	5.5	4.9	3.9	-	
90	4.5	4.3	3.5	-	
100	4.1	3.9	3.1	-	
110	4.0	3.6	2.8	-	
120	4.1	3.3	2.6	-	
130	4.5	3.0	2.4	-	
140	5.0	2.8	2.2	-	
150	5.6	2.6	2.1	-	
160	6.3	2.4	2.0	-	
170	7.1	2.3	1.8	-	
180	8.0	2.2	1.7	-	
190	8.9	2.1	1.6	-	
200	9.9	2.0	1.6	-	
210	10.9	1.9	1.5	-	
220	11.9	1.8	1.4	0.1	

Special Light

Specifiche

Lighting Light/ LED type 575nm excitation + white Number of LEDs 7 FL + 1 White LED on/off switchable: Yes Infrared filter No Diffuser available No Emission filter 610nm, LP Polarizer No Fluorophores TxRed, mCherry Optics Magnification 20x ~ 220x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (Mac OS) Supported image formats (Windows) Supported image formats (JPEG, PNG				
Number of LEDs LED on/off switchable: Infrared filter No Diffuser available No Emission filter Fluorophores Optics Magnification Working distance Sensor Sensor type Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (MacOS) Supported image formats (Windows) Supported image formats (Windows) Supported image formats (Windows) Supported image formats (Windows) JPEG, PNG				
Infrared filter No Diffuser available No Emission filter 610nm, LP Polarizer No Fluorophores TxRed, mCherry Optics Magnification 20x ~ 220x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (Mac OS) Supported image formats (Windows) PCX, MNG, WBMP, JP2, JPC, PGX Supported video formats (Windows) Supported image formats (Windows) Supported image formats (Windows) Supported image formats				
Diffuser available No Emission filter 610nm, LP Polarizer No Fluorophores TxRed, mCherry Optics Magnification 20x ~ 220x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (MacOS) Supported image formats (Windows) PCX, MNG, WBMP, JP2, JPC, PGX WMV, FLV, SWF (Windows) Supported image formats (JPEG, PNG				
Emission filter 610nm, LP Polarizer No Fluorophores TxRed, mCherry Optics Magnification 20x ~ 220x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (MacOS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats				
Polarizer No Fluorophores TxRed, mCherry Optics Magnification 20x ~ 220x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (MacOS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats (Mindows)				
Fluorophores Optics Magnification 20x ~ 220x Macro zoom No Working distance Lens type Glass with anti-reflection coating Sensor Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (MacOS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats				
Optics Magnification 20x ~ 220x Macro zoom No Working distance Lens type Glass with anti-reflection coating Sensor Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (Mac OS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats JPEG, PNG				
Magnification 20x ~ 220x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (MacOS) Supported image formats (Windows) Supported video formats (Windows) Supported video formats (Windows) Supported image formats (Windows)				
Macro zoom Working distance Lens type Glass with anti-reflection coating Sensor Sensor type Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (MacOS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats (Windows)				
Working distance Lens type Glass with anti-reflection coating Sensor Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (MacOS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats (Windows)				
Lens type Sensor Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (MacOS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats (Windows)				
Sensor type CMOS Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (MacOS) Supported image formats BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, (Windows) Supported video formats (Windows) Supported image formats (Windows) Supported image formats (Windows) Supported image formats (JPEG, PNG)				
Sensor type Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (Mac OS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats JPEG, PNG				
Resolution 1.3 Megapixel (1280x1024) Maximum frame rate 30 fps Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (Mac OS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats JPEG, PNG				
Maximum frame rate Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (Mac OS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats WMV, FLV, SWF (Windows) Supported image formats JPEG, PNG				
Compatibility Interface USB 2.0 Operating system Windows 7, 8, 10 & 11, MacOS 10.9 and up Software DinoCapture 2.0 (Windows), DinoXcope (Mac OS) Supported image formats (Windows) BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX Supported video formats (Windows) Supported image formats JPEG, PNG				
Interface Operating system Software Software DinoCapture 2.0 (Windows), DinoXcope (Mac OS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats (Windows) Supported image formats (Windows) Supported image formats (Windows) Supported image formats JPEG, PNG				
Operating system Software DinoCapture 2.0 (Windows), DinoXcope (Mac OS) Supported image formats (Windows) Supported video formats (Windows) Supported video formats (Windows) Supported image formats JPEG, PNG				
Software DinoCapture 2.0 (Windows), DinoXcope (Mac OS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats (Windows) Supported image formats JPEG, PNG				
OS) Supported image formats (Windows) Supported video formats (Windows) Supported image formats (Windows) Supported image formats Supported image formats JPEG, PNG				
(Windows) Supported video formats (Windows) Supported image formats JPEG, PNG PCX, MNG, WBMP, JP2, JPC, PGX WMV, FLV, SWF				
Supported video formats (Windows) Supported image formats JPEG, PNG				
Supported image formats JPEG, PNG				
(MacOS)				
Supported video formats MOV (MacOS)				
Imaging standards DirectShow, UVC				
Housing				
Housing material Composite/ plastic housing				
Magnification lock Yes				
Dimensions 10.5cm (L) x 3.2cm (D)				
Weight 100g				
Cable length 1.8m				
Features				
Special feature No				
Measurement Yes				
Calibration Yes				

Microtouch sensor	Yes
ESD safe	No
Information	
Package contents	Microscope, carry pouch, calibration target, user manual, N3C-C (Close Cap) N3C-EB (Extended Open Black Cap) N3C-LB (Black Long Cap) N3C-OB (Black Open Cap)
Warranty information	2 years European warranty
Regulatory approval	CE, FCC, ROHS
Price range	€700,00 - €900,00

Product Gallery





