# AM4115ZTL - EDGE



Marca: Codice del prodotto: AM4115ZTL


#### **Short Description**

1.3 Megapixel resolutionVersatility due to exchangeable caps10-140x magnificationPolarizer (anti-reflection)Long Working Distance (LWD)

#### Descrizione

The wide range of magnification (10-140x), the large field of view and working distance of up to 23 cm makes the AM4115ZTL the ideal solution for all situations where a longer distance between the microscope and the object is required or when it is needed to work under the microscope (repair, rework and assembly tasks etc.)

The built-in adjustable polarizer reduces glare and reflection on shiny objects.

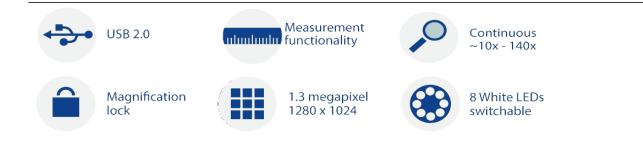







Exchangeable cap

## Working distance/field of view/depth of field

MAGNIFICATI WORKING		FIELD OF	FIELD OF	<b>DEPTH OF</b>
<b>ON RATE</b>	<b>DISTANCE*</b>	VIEW(X)	VIEW(Y)	FIELD
10	234.5	39.0	31.2	12
20	112.5	19.5	15.6	4.5
30	72.5	13.0	10.4	3.1
40	54.5	9.8	7.8	1.8
50	43.5	7.8	6.2	1.2
60	37.5	6.5	5.2	0.9
70	33.7	5.6	4.5	0.6
80	31.3	4.9	3.9	0.5
90	29.9	4.3	3.5	0.37
100	29.2	3.9	3.1	0.28
110	29.1	3.5	2.8	0.22
120	29.3	3.3	2.6	0.17
130	29.8	3.0	2.4	0.12
140	30.5	2.8	2.2	0.09
Listed values	* With front cap			Unit = mm
may differ				
slightly				

### Specifiche

Lighting	
Light/ LED type	White
Number of LEDs	8
LED on/off switchable:	Yes
Infrared filter	IR cut-filter >650 nm
Diffuser available	Yes (N3C-D included)
Emission filter	No
Polarizer	Yes, linear
Optics	
Magnification	$10x \sim 140x$
Macro zoom	No

Working distance	Long		
Lens type	Glass with anti-reflection coating		
Sensor			
Sensor type	CMOS		
Resolution	1.3 Megapixel (1280x1024)		
Maximum frame rate	30 fps		
Compatibility			
Interface	USB 2.0		
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up		
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)		
Supported image formats (Windows)	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX		
Supported video formats (Windows)	WMV, FLV, SWF		
Supported image formats (MacOS)	JPEG, PNG		
Supported video formats (MacOS)	MOV		
Imaging standards	DirectShow, UVC		
Housing			
Housing material	Composite/ plastic housing		
Magnification lock	Yes		
Dimensions	10.5cm (L) x 3.2cm (D)		
Weight	105g		
Cable length	1.8m		
Features			
Special feature	No		
Measurement	Yes		
Calibration	Yes		
Microtouch sensor	Yes		
ESD safe	No		
Information			
Package contents	Microscope, carry pouch, software CD, calibration		
	target, user manual, N3C-O- Open cap, N3C-C-		
	Closed cap, N3C-D- Diffuser cap,N3C-E-		
	Extension cap, N3C-L- Long cap, N3C-S- Side light cap		
Warranty information	2 years European warranty		
Regulatory approval	CE, FCC, ROHS		
Price range	€600,00 - €800,00		