

AF4135ZTLE

Marca:

Codice del prodotto: AF4135ZTLE


Short Description

1.3 Megapixel Edge sensor
10x~200x magnification
Flexible LED Control (FLC)
Polarizer
Wireless-ready

Descrizione

The Dino-Lite AF4135ZTLE is part of Long Working Distance (LWD) series and connects to your device via USB. The AF4135ZTLE is Wireless-ready, but requires the (optional) WF-20 to make it a fully wireless solution.

In comparison, the AF4x35 series provides a similar working distance range but achieves higher magnifications compared to the AM4x15 series.

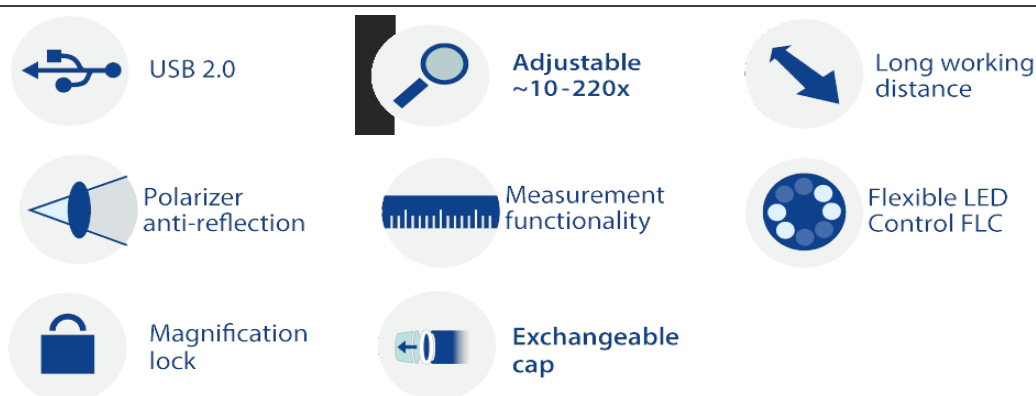

The AF4135ZTLE is equipped with premium features such as Flexible LED Control (FLC), integrated polarizer, extensive measurement functionality.

The main features of the AF4135ZTLE are:

- Wireless-ready, requires the WF-20 adapter (optional)
- 10x~200x magnification
- 1.3 Megapixel Edge sensor

- Integrated polarizer (anti-reflection)
- Extensive measurement functionality
- Flexible LED Control (FLC)
- And more...

Working distance/field of view/depth of field

| Magnification Rate | Working Distance * | Field of View(x) | Field of View(y) | Depth of Field |
|--|----------------------------|------------------|------------------|------------------|
| Listed values may differ slightly | * Without front cap | | | Unit = mm |
| 10 | 355.8 | 39.1 | 29.3 | 55.2 |
| 20 | 173.0 | 19.5 | 14.7 | 14.5 |
| 30 | 113.1 | 13.0 | 9.8 | 6.7 |
| 40 | 83.8 | 9.8 | 7.3 | 3.9 |
| 50 | 66.8 | 7.8 | 5.9 | 2.6 |
| 60 | 55.9 | 6.5 | 4.9 | 1.9 |
| 70 | 48.6 | 5.6 | 4.2 | 1.5 |
| 80 | 43.4 | 4.9 | 3.7 | 1.2 |
| 90 | 39.8 | 4.3 | 3.3 | 1.0 |
| 100 | 37.1 | 3.9 | 2.9 | 0.8 |
| 110 | 35.2 | 3.6 | 2.7 | 0.7 |
| 120 | 33.8 | 3.3 | 2.4 | 0.6 |
| 130 | 32.9 | 3.0 | 2.3 | 0.5 |
| 140 | 32.3 | 2.8 | 2.1 | 0.5 |
| 150 | 32.0 | 2.6 | 2.0 | 0.4 |
| 160 | 31.8 | 2.4 | 1.8 | 0.4 |
| 170 | 31.9 | 2.3 | 1.7 | 0.4 |
| 180 | 32.1 | 2.2 | 1.6 | 0.3 |
| 190 | 32.5 | 2.1 | 1.5 | 0.3 |
| 200 | 33.0 | 2.0 | 1.5 | 0.3 |

Specifich

| Lighting | |
|------------------------|-----------------------|
| Light/ LED type | White |
| Number of LEDs | 8 |
| LED on/off switchable: | Yes |
| Infrared filter | IR cut-filter >650 nm |
| Diffuser available | Yes (N3C-D included) |

| | |
|-----------------------------------|--|
| Emission filter | No |
| Polarizer | Yes, linear |
| Optics | |
| Magnification | 10x ~ 200x |
| Macro zoom | No |
| Working distance | Long |
| Lens type | Glass with anti-reflection coating |
| Sensor | |
| Sensor type | CMOS |
| Resolution | 1.3 Megapixel (1280x1024) |
| Maximum frame rate | 30 fps |
| Compatibility | |
| Interface | USB 2.0 |
| Operating system | Windows 7, 8, 10 & 11, MacOS 10.12 and up |
| Software | DinoCapture 2.0 (Windows), DinoXcope (Mac OS) |
| Supported image formats (Windows) | BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX |
| Supported video formats (Windows) | WMV, FLV, SWF |
| Supported image formats (MacOS) | JPEG, PNG |
| Supported video formats (MacOS) | MOV |
| Imaging standards | DirectShow, UVC |
| Wifi | Wireless-ready, requires the WF-20 adapter (optional) |
| Housing | |
| Housing material | Composite/ plastic housing |
| Magnification lock | Yes |
| Dimensions | 11.4cm (L) x 3.3cm (D) |
| Weight | 111g |
| Cable length | 1.8m |
| Features | |
| Special feature | Flexible LED Control (FLC) |
| Measurement | Yes |
| Calibration | Yes |
| Microtouch sensor | Yes |
| ESD safe | No |
| Information | |
| Package contents | Microscope, carry pouch, software CD, calibration target, user manual, N3C-O- Open cap, N3C-C- |

| | |
|----------------------|---|
| | Closed cap, N3C-D- diffuser cap, N3C-E- Extension cap, N3C-L- Long cap, N3C-S- Side light cap |
| Warranty information | 2 years European warranty |
| Regulatory approval | CE, FCC, ROHS |
| Price range | €550,00 - €750,00 |

Product Gallery