## AM4115T-CFVW

Marka: Ürün Kodu: AM4115T-CFVW




**Short Description** 

1.3 Megapixel resolution400nm excitation and 430nm emission filter20-220x magnificationTo observe DAPI

## Aç?klama

The Dino-Lite AM4115T-CFVW digital microscope is optimized for research and viewing fluorescent objects by using 400nm near UV excitation LEDs. It has a long-pass type 430nm emission filter that is designed to observe a wide range of fluorophores with applications in developmental biology, pathology, and anatomy.

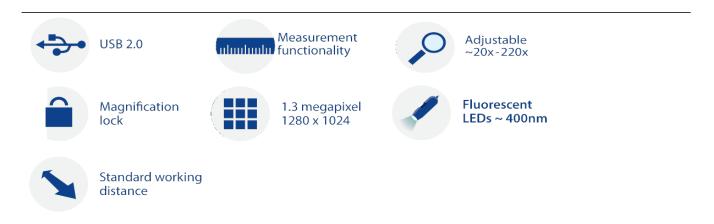

The AM4115T-CFVW has the capability of switching the light source from the 400nm

near UV excitation LEDs to the white LED, which is convenient for locating the object and obtaining an easy focus. All of these factors make the AM4115T-CFVW the smallest fluorescence microscope in the world, capable of many applications and visualizing a vast range of fluorescence.

## » Special models available on request.

Working distan	ce/field of view/d	epth of field		
MAGNIFICATI	WORKING	FIELD OF	FIELD OF	DEPTH OF
ON RATE	DISTANCE	VIEW(X)	VIEW(Y)	FIELD
Listed values	* Without front	;		Unit = mm
may differ	сар			
slightly				
20	(0, 2)	10.5	15 (	2.5
20	60.2	19.5	15.6	2.5
30	33.5	13.0	10.4	1.8
40	20.9	9.8	7.8	1.5
50	13.9	7.8	6.3	-
60	9.7	6.5	5.2	-
70	7.1	5.6	4.5	1.0
80	5.5	4.9	3.9	-
90	4.5	4.3	3.5	-
100	4.1	3.9	3.1	-
110	4.0	3.6	2.8	-
120	4.1	3.3	2.6	-
130	4.5	3.0	2.4	-
140	5.0	2.8	2.2	-
150	5.6	2.6	2.1	-
160	6.3	2.4	2.0	-
170	7.1	2.3	1.8	-
180	8.0	2.2	1.7	-
190	8.9	2.1	1.6	-
200	9.9	2.0	1.6	-
210	10.9	1.9	1.5	-
220	11.9	1.8	1.4	0.1

## **Special Light**

EXCITA	TION 400 nm EMISSIC	ON 430 nm			
300 nm	400 nm	500 nm	600 nm	700 nm	800 nm
ULTRAVIOL	et 🌗	SPECTRUM OI	VISIBLE LIGHT		INFRARED

Lighting	
Light/ LED type	400nm excitation + white
Number of LEDs	7 FL + 1 White
LED on/off switchable:	Yes
Infrared filter	No
Diffuser available	No
Emission filter	430nm, LP
Polarizer	No
Fluorophores	DAPI
Optics	
Magnification	$20x \sim 220x$
Macro zoom	No
Working distance	Standard
Lens type	Glass with anti-reflection coating
Sensor	
Sensor type	CMOS
Resolution	1.3 Megapixel (1280x1024)
Maximum frame rate	30 fps
Compatibility	
Interface	USB 2.0
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX
Supported video formats (Windows)	WMV, FLV, SWF
Supported image formats (MacOS)	JPEG, PNG
Supported video formats	MOV

(MacOS)			
Imaging standards	DirectShow, UVC		
Wifi	Wireless-ready, requires the WF-10 WiFi streamer		
	(optional)		
Housing			
Housing material	Composite/ plastic housing		
Magnification lock	Yes		
Dimensions	10.5cm (L) x 3.2cm (D)		
Weight	100g		
Cable length	1.8m		
Features			
Special feature	No		
Measurement	Yes		
Calibration	Yes		
Microtouch sensor	Yes		
ESD safe	No		
Information			
Package contents	Microscope, carry pouch, software CD, calibration		
	target, user manual		
Warranty information	2 years European warranty		
Regulatory approval	CE, FCC, ROHS		
Price range	€700,00 - €900,00		
Product Gallery			

