Dino-Lite Europe - Phone: - Email:

AM7515MTFP-APL



Marka:


Ürün Kodu: AM7515MTFP

Short Description

5 Megapixel Edge sensor Aim point laser (APL) Long Working Distance (LWD) 45-70x magnification Automatic Magnification Reading (AMR) Flexible LED Control (FLC)

Aç?klama

Integrated with Aim Point Laser (APL), the AM7515MTFP eases the tasks of locating and focusing the target under the microscope. The AM7515MTFP is a 5MP Extra Long Working Distance (ELWD) microscope, equipped with a 45-70x magnification range featuring AMR, FLC, APL and a metal housing. The microscope providing clear images up to 70x magnification at 108 mm working distance.

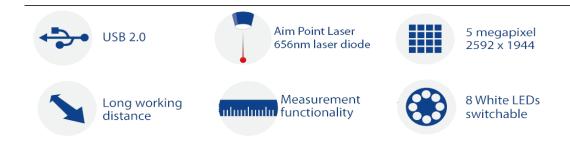













The AM7515MTFP is part of the Long Working Distance (LWD) range and with its Long Working Distance and magnification range from 45-70x, it is suitable for a wide range of applications where extra distance to the object or a larger field of view is required.

The extra working distance and larger field of view make this model an ideal solution for tasks such as repair, rework or assembly or for working with bulky or fragile objects that cannot be touched. Because of the built-in polarization filter this model is ideal when working with shiny or reflective objects such as metal, plastic, glass, jewelry, electronics, etc. The AMR function is of particular importance when the measurement functions are frequently used.

The Aim Point Laser (APL) is an integrated trough-lens laser projecting a red dot that provides a visual reference point for the positioning and focusing of the target.

The main features of the AM7515MTFP are:

- 5 Megapixel Edge sensor
- Long Working Distance (LWD)
- 45-70x magnification
- Integrated polarizer
- Aluminum housing
- Automatic Magnification Reading (AMR)
- Flexible LED Control (FLC)
- Extensive measurement functions
- Calibration
- Exchangeable front caps
- And more...

TION RATE	DISTANCE	1DISTANCE	VIEW(X)	VIEW(Y)	FIELD
		2*			
Listed values		* Without			Unit = mm
may differ		front cap			
slightly					
45	-	146	8.7	6.9	2.1
50	-	135	7.8	6.3	1.8
60	-	120	6.5	5.2	1.3
70	-	108	5.6	4.5	1.0
Listed values		* Without			Unit = mm
may differ		front cap			
slightly					

Özellikler

Lighting				
Light/ LED type	White			
Number of LEDs	8			
LED on/off switchable:	Yes			
Infrared filter	IR cut-filter >650 nm			
Diffuser available	Yes (N3C-D included)			
Emission filter	No			
Polarizer	No			
Laser Pointer	656nm laser diode			
Optics				
Magnification	$45 \sim 70x$			
Macro zoom	No			
Working distance	Long			
Lens type	Glass with anti-reflection coating			
Sensor				
Sensor type	CMOS			
Resolution	5.0 Megapixel (2592x1944)			
Maximum frame rate	30 fps			
Compatibility				
Interface	USB 2.0			
Operating system	Windows 7, 8, 10 & 11, MacOS 10.14 and up			
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)			
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,			
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX			

Supported video formats (Windows)	WMV, FLV, SWF			
Supported image formats (MacOS)	JPEG, PNG			
Supported video formats (MacOS)	MOV (max 1.3MP)			
Imaging standards	DirectShow, UVC			
Wifi	Wireless-ready, requires the WF-10 WiFi streamer (optional)			
Housing				
Housing material	Metal housing			
Dimensions	10.7cm (L) x 3.2cm (D)			
Weight	140gr			
Cable length	1.8m			
Features				
Special feature	Automatic Magnification Reading (AMR), Flexible LED Control (FLC). Aim Pointer Laser (APL)			
Measurement	Yes			
Calibration	Yes			
Microtouch sensor	Yes			
ESD safe	Yes			
Information				
Package contents	Microscope, carry pouch, software CD, calibration target, user manual, N3C-O- Open cap, N3C-C- Closed cap, N3C-D- Diffuser cap, N3C-E- Extension cap, N3C-L- Long cap, N3C-S- Side light cap			
Warranty information	2 years European warranty			
Regulatory approval	CE, FCC, ROHS			
Price range	€900,00 - €1000,00			