Dino-Lite Europe - Phone: - Email:

AM4013MT5



Marka: Dino-Lite


Ürün Kodu: AM4013MT5

Short Description

1.3 Megapixel resolutionRobust metal housing500x Fixed magnificationFor high magnification applications

Aç?klama

The AM4013MT5 has a aluminium alloy body and features fixed 500x magnification for high power applications. This model also provides the possibility to calibrate the microscope for measurements. The aluminium housing offers enhanced protection and durability and has the best look and feel.

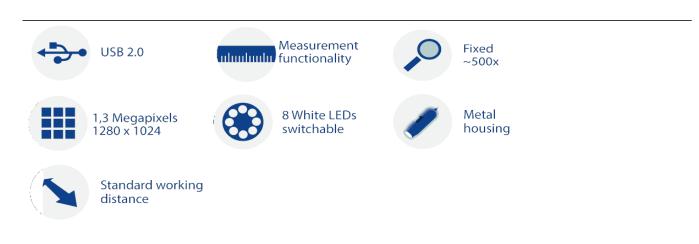

Working	distance	/field	of v	view/d	lenth	of field
11011115	uistance	/ IICIU	OI.	1 1 C 11 / C		or riciu

MAGNIFICATI	WORKING	FIELD OF	FIELD OF	DEPTH OF
ON RATE	DISTANCE	VIEW(X)	VIEW(Y)	FIELD
Listed values				Unit = mm
may differ				
slightly				
515	0.1	0.8	0.6	0.07

Özellikler

Ozellikier	
Lighting	
Light/ LED type	White
Number of LEDs	8
LED on/off switchable:	Yes
Infrared filter	IR cut-filter >650 nm
Diffuser available	No
Emission filter	No
Polarizer	No
Optics	
Magnification	500x
Macro zoom	No
Working distance	Standard
Lens type	Glass with anti-reflection coating
Sensor	
Sensor type	CMOS
Resolution	1.3 Megapixel (1280x1024)
Maximum frame rate	30 fps
Compatibility	
Interface	USB 2.0
Operating system	Windows 7,8,10 & 11, MacOS 10.9 and up
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Supported image formats (Windows)	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
Supported video formats (Windows)	WMV, FLV, SWF
Supported image formats (MacOS)	JPEG, PNG
Supported video formats (MacOS)	MOV
Imaging standards	DirectShow, UVC
Wifi	Wireless-ready, requires the WF-10 WiFi streamer (optional)

Housing			
Housing material	Metal housing		
Magnification lock	No		
Dimensions	10.5cm (L) x 3.2cm (D)		
Weight	140g		
Cable length	1.8m		
Features			
Special feature	No		
Measurement	Yes		
Calibration	Yes		
Microtouch sensor	Yes		
ESD safe	Yes		
Information			
Package contents	Microscope, carry pouch, software CD, calibration		
	target, user manual		
Warranty information	2 years European warranty		
Regulatory approval	CE, FCC, ROHS		
Price range	€350,00 - €550,00		

Product Gallery



