Dino-Lite Europe - Phone: - Email:

AM4113TL



Marka:


Ürün Kodu: AM4113TL

Short Description

1.3 Megapixel resolution With magnification lock 10x ~ 90x magnification Long working distance

Aç?klama

The AM4113TL is a special model with long working distance up to 15 cm at 20x magnification and around 4cm at 90x magnification. The extra working distance makes the TL series an ideal solution for tasks where you need more working distance to the object, for example repair, rework or assembly tasks.

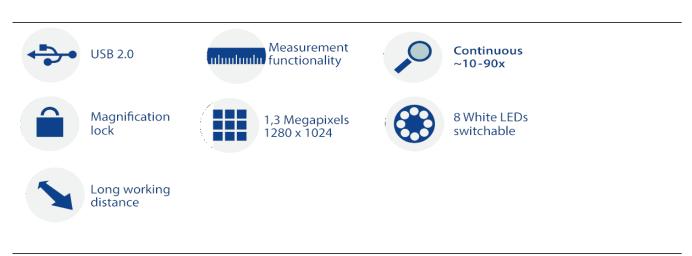

Working distance/field of view/depth of field

MAGNIFICATI WORKING		FIELD OF	FIELD OF	DEPTH OF	
ON RATE	DISTANCE	VIEW(X)	VIEW(Y)	FIELD	
20	151.0	19.6	15.6		6
30	101.0	13.0	10.4	3.4	
40	77.2	9.8	7.8	2.2	
50	64.1	7.8	6.3	1.65	
60	56.2	6.5	5.2	•	
70	51.3	5.6	4.5	•	
80	48.3	4.9	3.9	•	
90	46.6	4.3	3.5	0.8	
Listed values may differ				Unit = mm	

Özellikler

slightly

Lighting				
	White			
Light/ LED type				
Number of LEDs	8			
LED on/off switchable:	Yes			
Infrared filter	IR cut-filter >650 nm			
Diffuser available	No			
Emission filter	No			
Polarizer	No			
Optics				
Magnification	$10x \sim 90x$			
Macro zoom	No			
Working distance	Long			
Lens type	Glass with anti-reflection coating			
Sensor				
Sensor type	CMOS			
Resolution	1.3 Megapixel (1280x1024)			
Maximum frame rate	30 fps			
Compatibility				
Interface	USB 2.0			
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up			
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac			
	OS)			
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,			
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX			
Supported video formats	WMV, FLV, SWF			
(Windows)				

Supported image formats (MacOS)	JPEG, PNG		
Supported video formats (MacOS)	MOV		
Imaging standards	DirectShow, UVC		
Wifi	Wireless-ready, requires the WF-10 WiFi streamer (optional)		
Housing			
Housing material	Composite/ plastic housing		
Magnification lock	Yes		
Dimensions	10.5cm (L) x 3.2cm (D)		
Weight	105g		
Features			
Special feature	No		
Measurement	Yes		
Calibration	Yes		
Microtouch sensor	Yes		
ESD safe	No		
Information			
Package contents	Microscope, carry pouch, software CD, calibration target, user manual		
Warranty information	2 years European warranty		
Regulatory approval	CE, FCC, ROHS		
Price range	€350,00 - €500,00		