

# AM7915MZTL - EDGE

**Merk:**

**Productcode:** AM7915MZTL



## Korte omschrijving

- 5 Megapixel resolution
- Extended Depth of Field (EDOF)
- Extended Dynamic Range (EDR)
- Flexible LED Control (FLC)
- 10-140x magnification
- Long working distance (LWD)

## Omschrijving

The AM7915MZTL is part of the Long Working Distance (LWD) range and with its Long Working Distance and magnification range from 10 - 140x, it is suitable for a wide range of applications where extra distance to the object or a larger field of view is required.



USB 2.0



Continuous  
~10x - 140x



5 megapixel  
2592 x 1944




Long working  
distance



Metal  
housing



Extended  
Depth Of Field  
EDOF

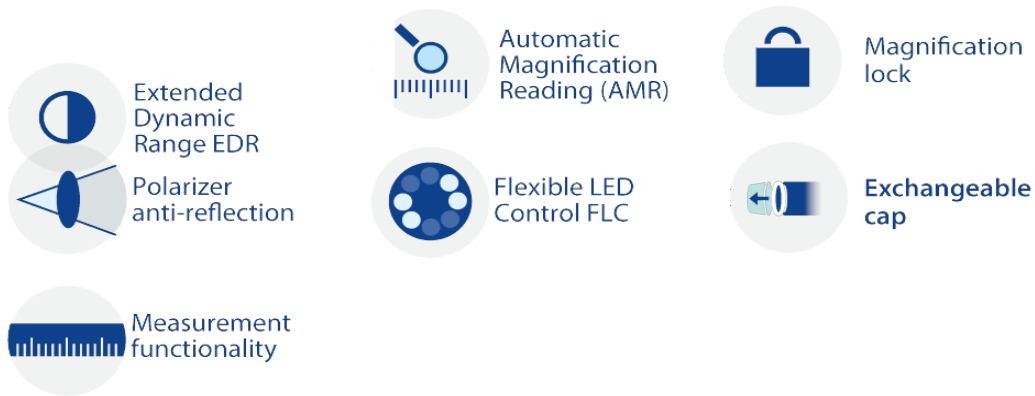

With the Extended Dynamic Range (EDR) feature, the details of darker or brighter areas within the object can be revealed by stacking images at different exposure levels. The Extended Depth of Field (EDOF) feature automatically stacks images at different focus level to improve the depth of field on rough or uneven surfaces. The AMR function is of particular importance when the measurement functions are frequently used. Because of the built-in polarization filter this model is ideal when working with shiny or reflective objects such as metal, plastic, glass, jewelry, electronics, etc.

**The main features of the AM7915MZTL are:**

- 5 Megapixel Edge sensor
- Extended Depth of Field (EDOF)
- Extended Dynamic Range (EDR)
- 10-140x magnification
- Long working distance
- Automatic Magnification Reading (AMR)
- Adjustable polarizer
- Flexible LED Control (FLC)
- And more...

*(\*EDOF/EDR only functions under Windows OS)*

**Working distance/field of view/depth of field**

MAGNIFICATION RATE	WORKING DISTANCE*	FIELD OF VIEW(X)	FIELD OF VIEW(Y)	DEPTH OF FIELD
<b>Listed values may differ</b>	<b>*Without front cap</b>			<b>Unit = mm</b>

**slightly**

10	234.5	39.0	29.2	12.0
20	112.5	19.5	14.6	4.5
30	72.5	13.0	9.7	3.1
40	54.5	9.8	7.3	1.8
50	43.5	7.8	5.8	1.2
60	37.5	6.5	4.8	0.9
70	33.7	5.6	4.2	0.6
80	31.3	4.9	3.6	0.5
90	29.9	4.3	3.2	0.37
100	29.2	3.9	2.9	0.28
110	29.1	3.5	2.6	0.22
120	29.3	3.3	2.4	0.17
130	29.8	3.0	2.2	0.12
140	30.5	2.8	2.1	0.09

**Specificatie**

Verlichting	
Licht / LED-type	White
Aantal leds	8
LED aan / uit schakelbaar:	Yes
Infrarood filter	IR cut-filter >650 nm
Diffusor beschikbaar	Yes (N3C-D included)
Emissiefilter	No
Polarisator	Yes, linear
Optiek	
Magnification	10x ~ 140x
Macro zoom	No
Werkafstand	Long
Type lens	Glass with anti-reflection coating
Sensor	
Sensortype	CMOS
Resolutie	5.0 Megapixel (2592x1944)
Maximale framesnelheid	30 fps
Compatibiliteit	
Interface	USB 2.0
Besturingssysteem	Windows 7, 8, 10 & 11, MacOS 10.9 and up

Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Ondersteunde beeldformaten (Windows)	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
Ondersteunde videoformaten (Windows)	WMV, FLV, SWF
Ondersteunde beeldformaten (MacOS)	JPEG, PNG
Ondersteunde videoformaten (MacOS)	MOV (max 1.3MP)
Beeldvormingsnormen	DirectShow, UVC
Wifi	Wireless-ready, requires the WF-10 WiFi streamer (optional)
<b>Behuizing</b>	
Materiaal van de behuizing	Metal housing
Afmetingen	10.5cm (L) x 3.2cm (D)
Gewicht	137g
Kabellengte	1.8m
<b>Kenmerken</b>	
Bijzonderheid	Automatic Magnification Reading (AMR), Extended Dynamic Range (EDR), Extended Depth of Field (EDOF), Flexible LED Control (FLC)
Meting	Yes
Kalibratie	Yes
Microtouch-sensor	Yes
ESD veilig	Yes
<b>Informatie</b>	
Inhoud van de verpakking	Microscope, carry pouch, software CD, calibration target, user manual, N3C-C (Close Cap), N3C-D (Diffuser Cap), N3C-D2 (Opal Diffuser Cap), N3C-E (Extended Open Cap), N3C-L (Long Cap), N3C-O (Open Cap), N3C-S (Sidelight Cap)
Garantie-informatie	2 years European warranty
Regelgevende goedkeuring	CE, FCC, ROHS
Prijsklasse	€1100,00 - €1300,00

## Product galerij